

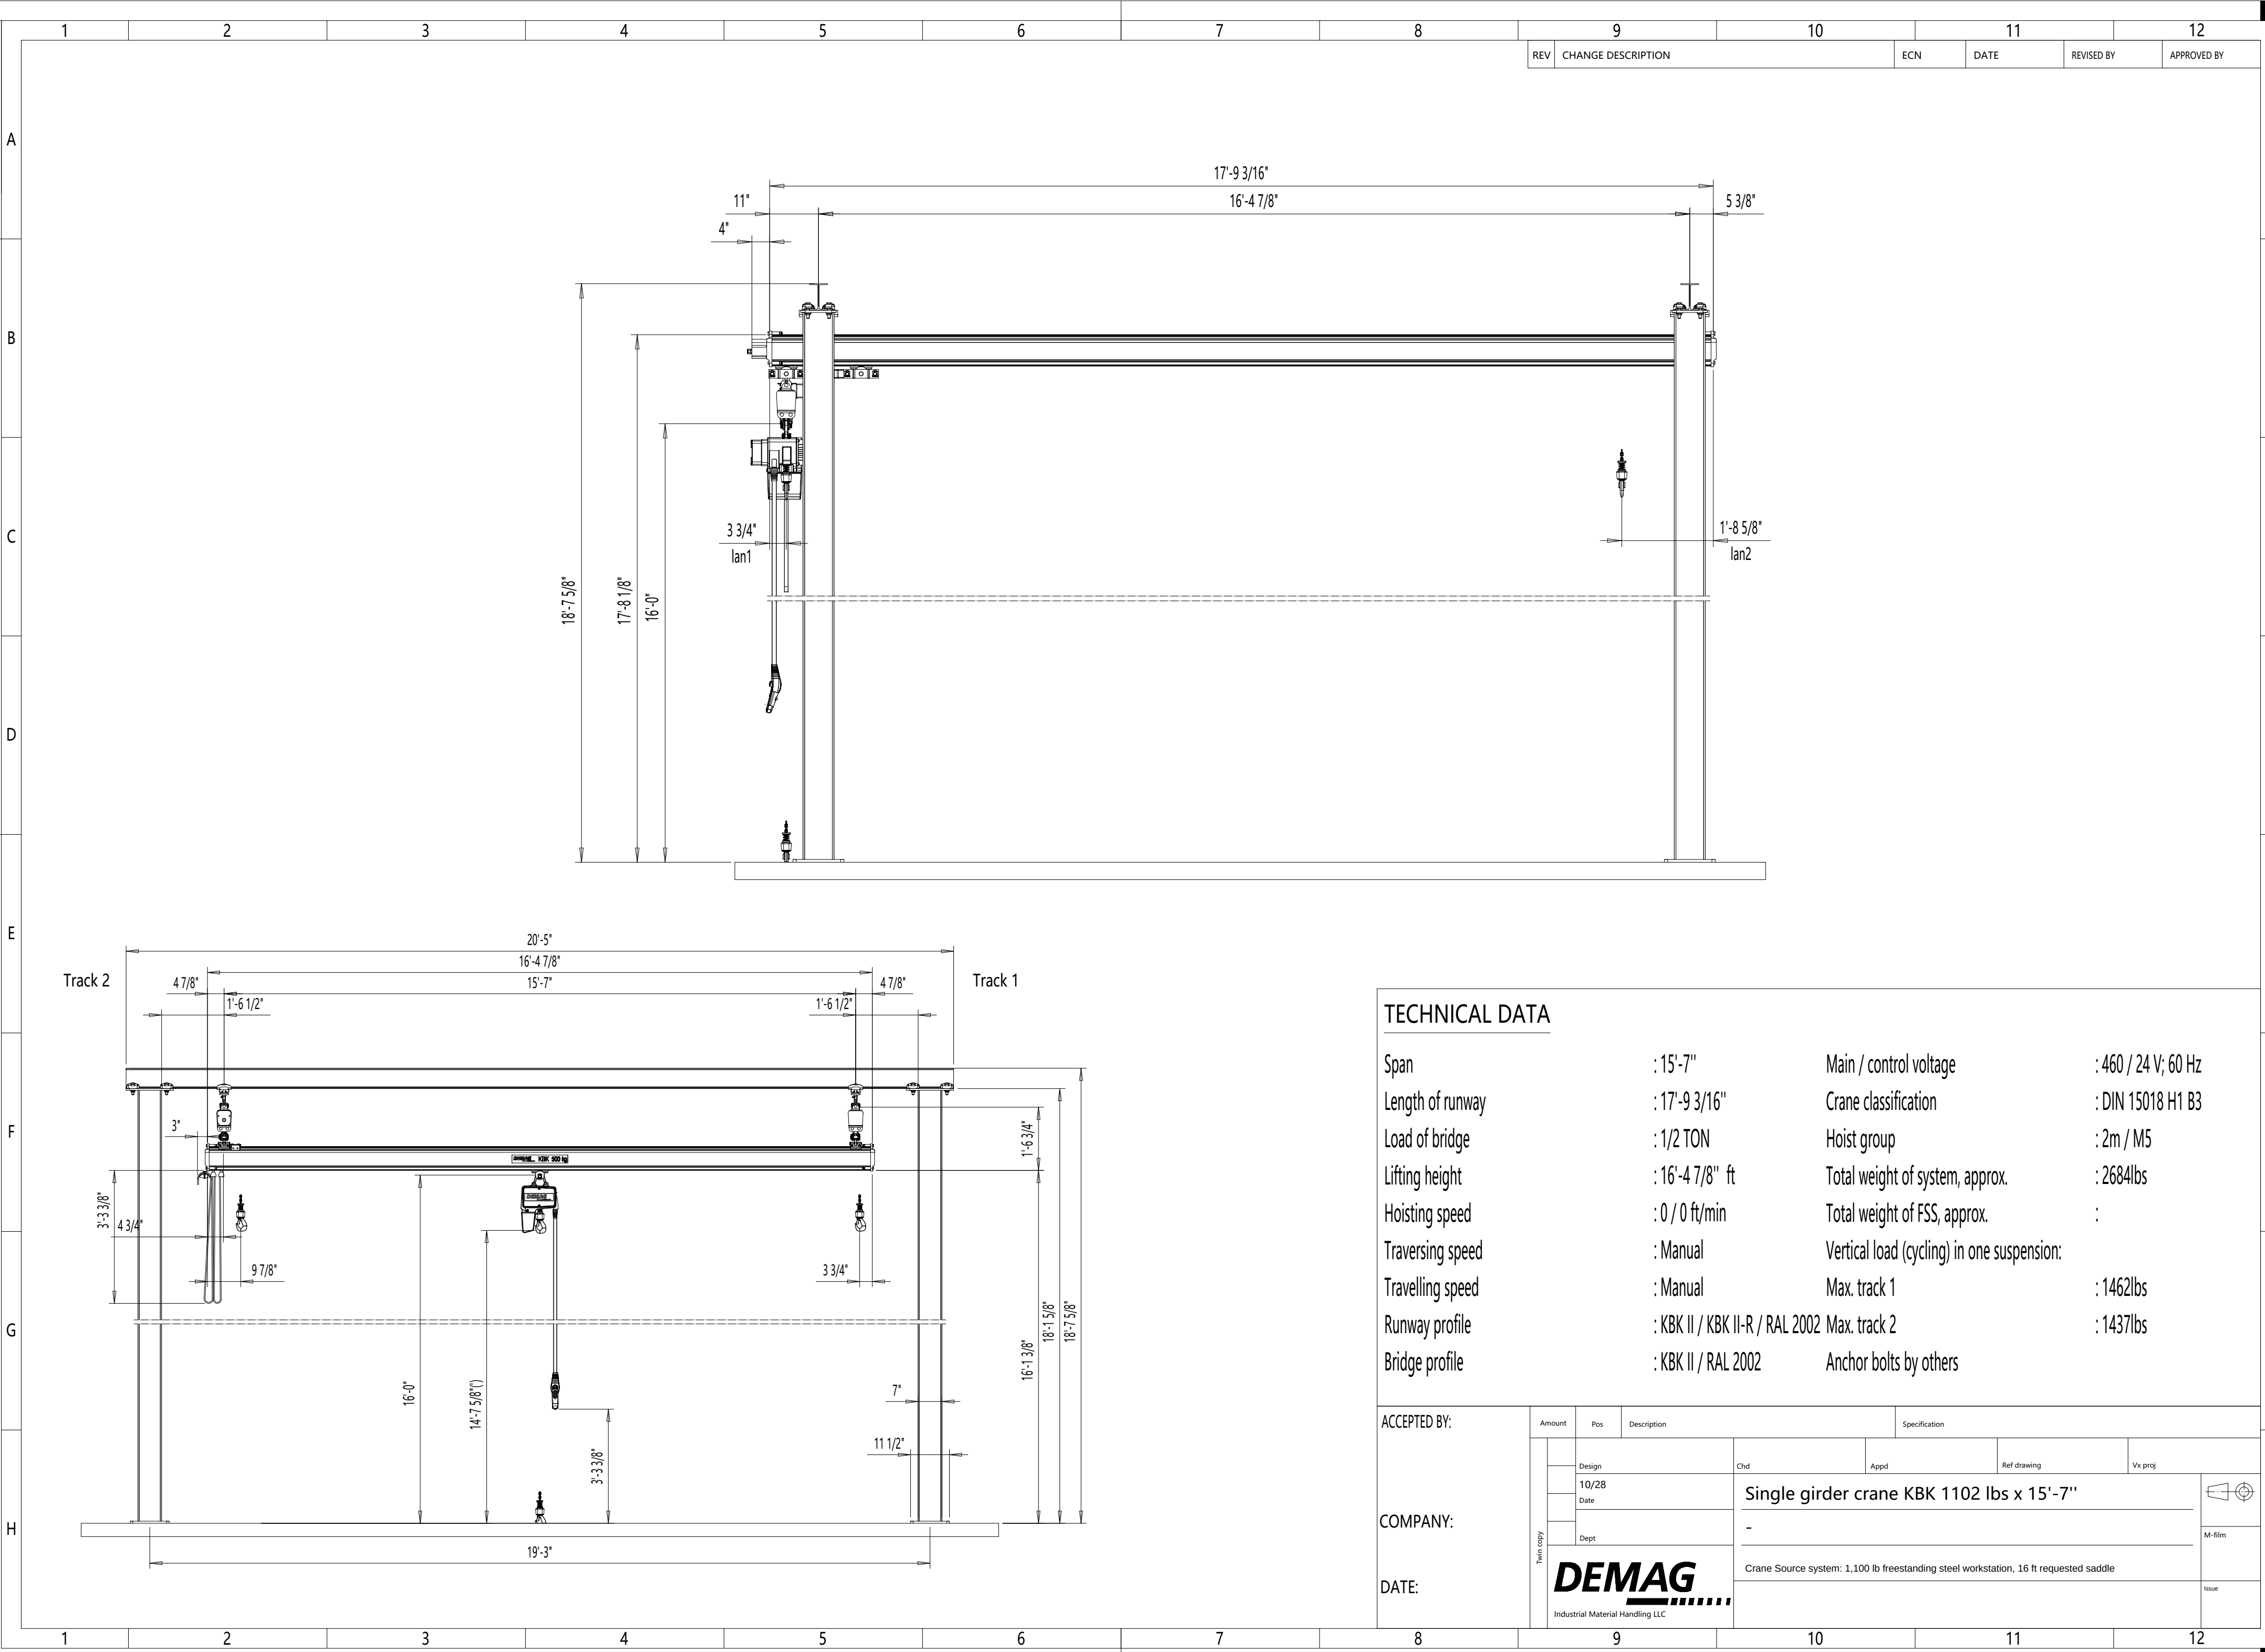


This document is the absolute property of Industrial Material Handling LLC. This document must not be copied without the written permission of Industrial Material Handling LLC or its parent company DEMAG. The contents thereof must not be disclosed to a third party nor be used for any unauthorized purpose. Contravention will be prosecuted.

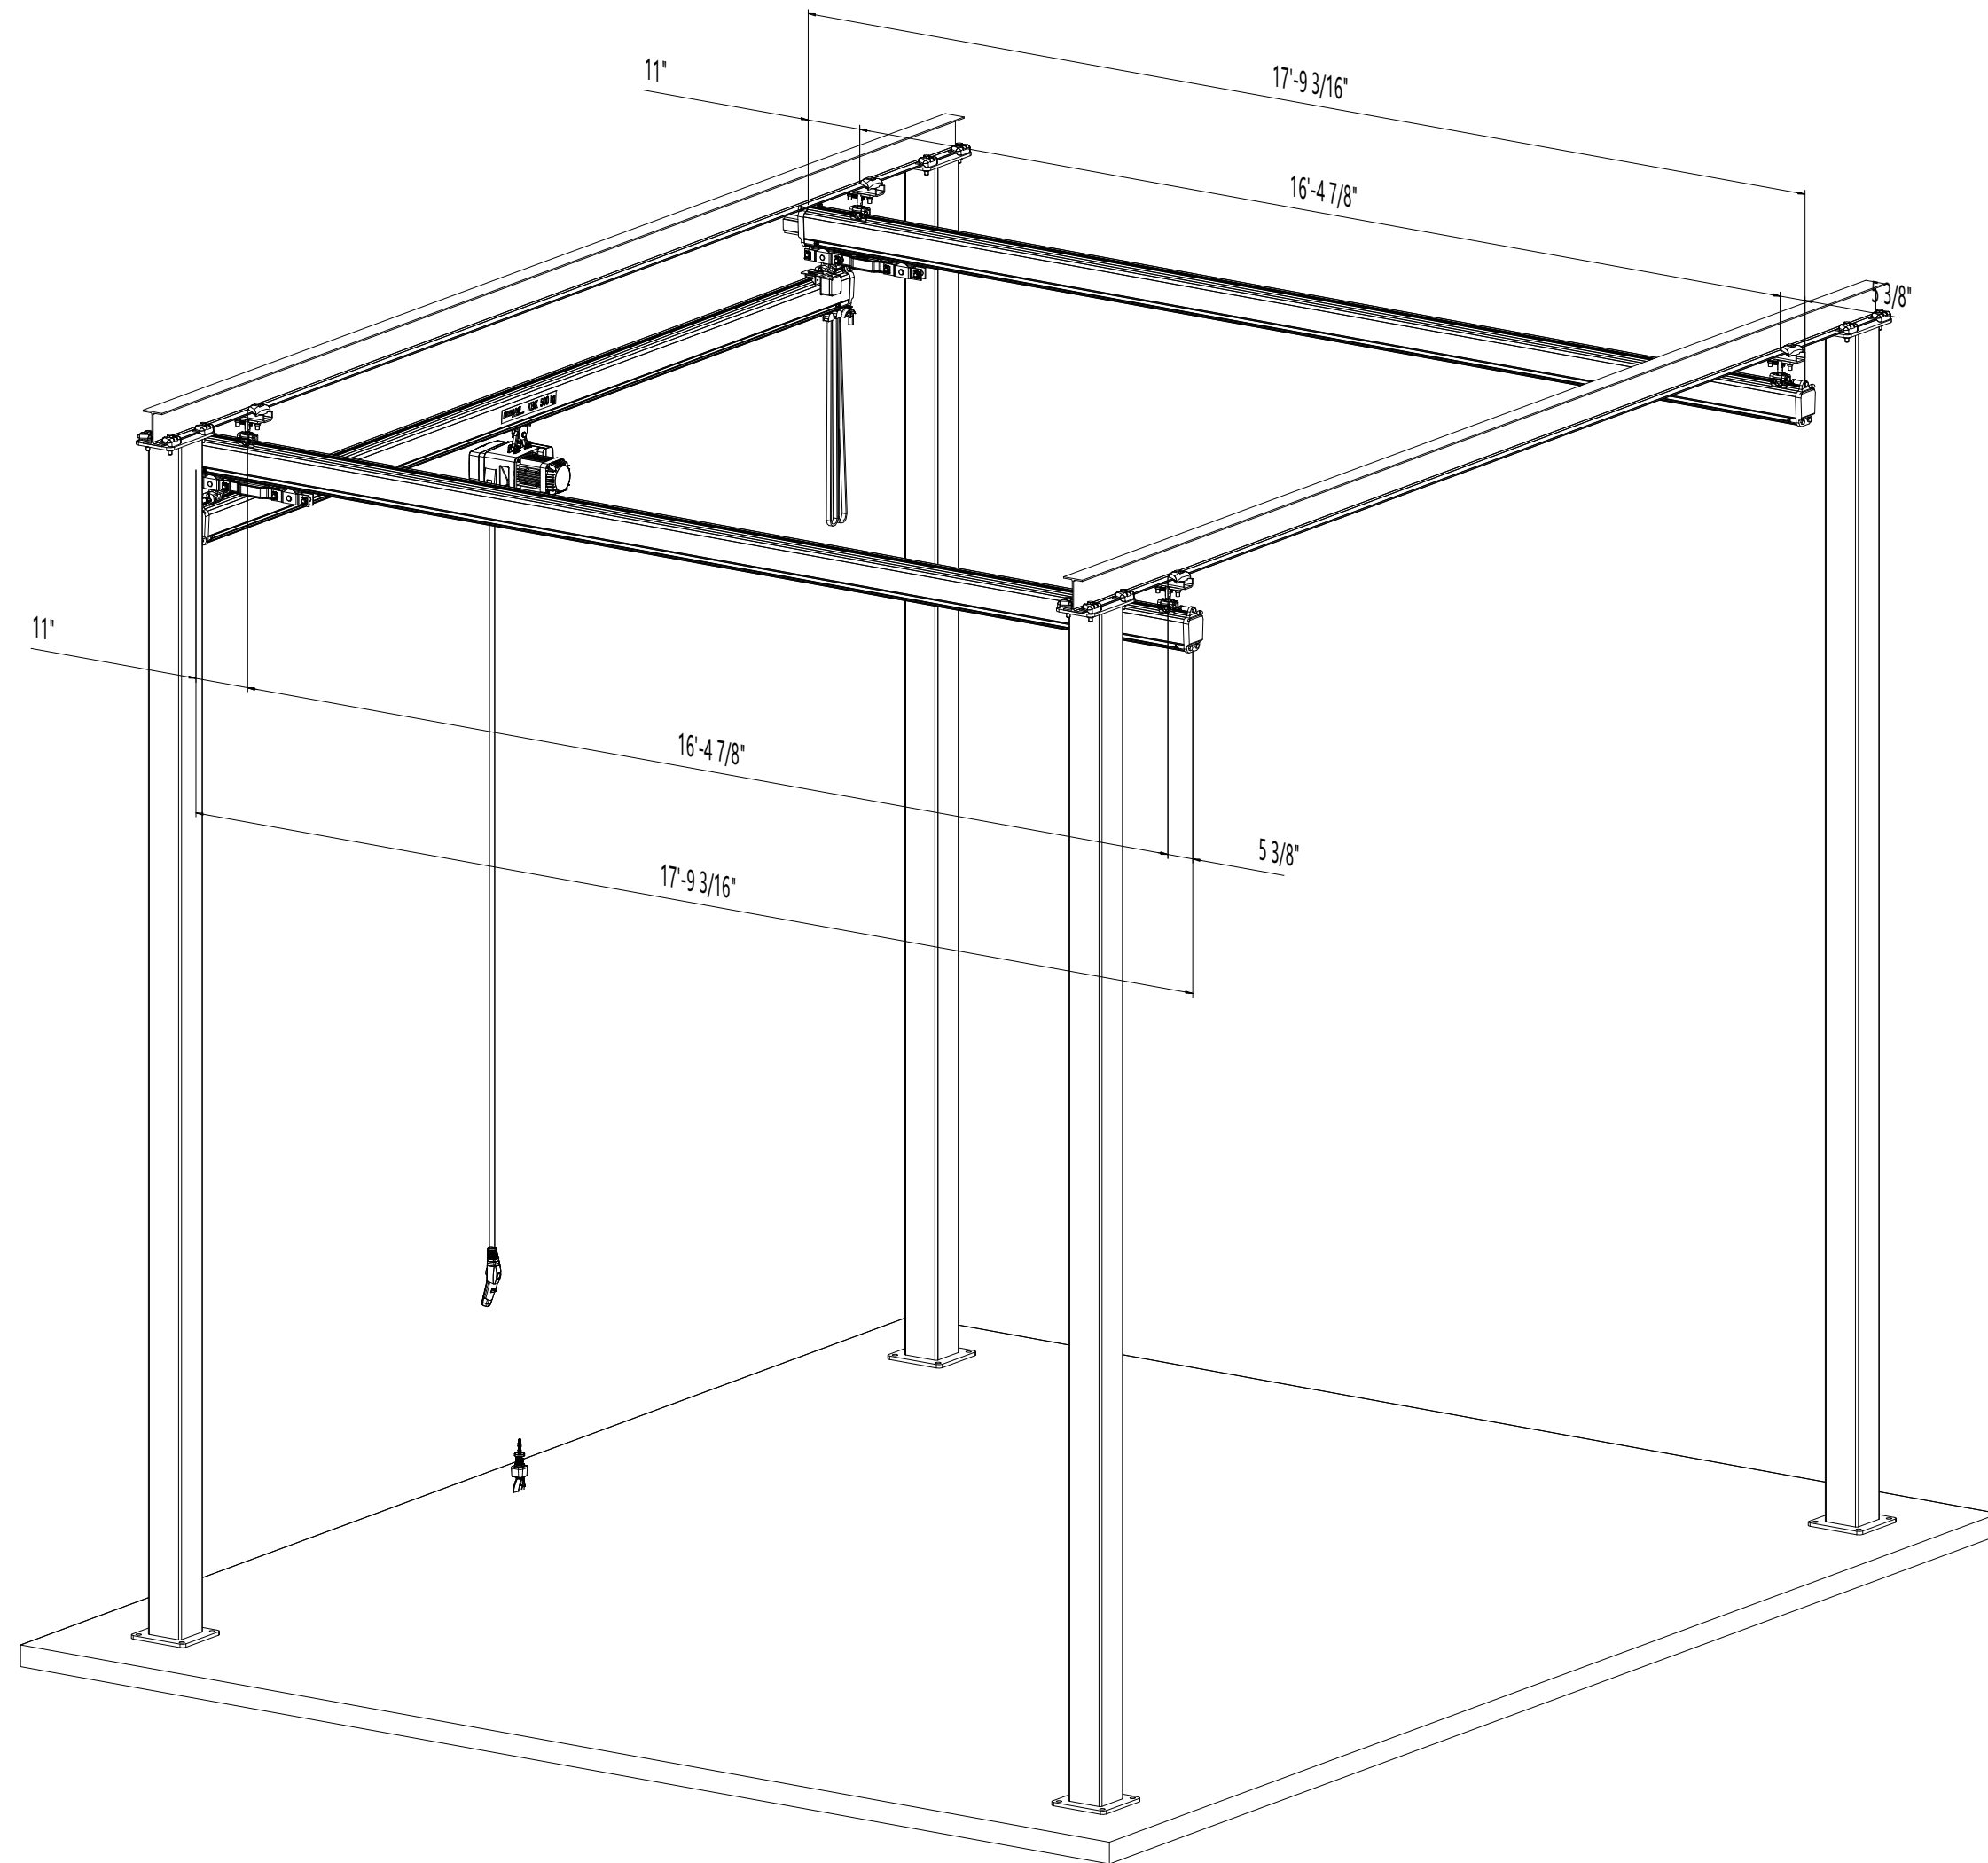

REV	CHANGE DESCRIPTION	ECN	DATE	REVISED BY	APPROVED BY
-----	--------------------	-----	------	------------	-------------

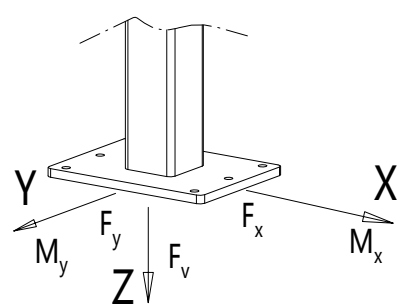

Maximum values

Fy	243 lbf
My	2587 Lb ft
Fv	3008 lbf
Fx	121 lbf
Mx	5137 Lb ft

Suspension Load

$$G_{AB} =$$

ANCHORING

We recommend to use chemical anchors which are permitted for dynamic loads.

Anchor bolts may be used for anchoring with mainly static loads and mainly non-static loads in reinforced and non-reinforced normal concrete. They may be anchored in cracked and non-cracked concrete.

Concrete type: 4000 psi, un-cracked condition.

The minimum concrete depth is 6 in. or more, depending on the selected anchor bolts.


The drill hole diameter in the base plate for anchoring is always 1 in.

It is the responsibility of the customer to ensure that supporting foundations and structures are suitable for the applied loadings of offered equipment.


Amount	Pos	Description	Specification				
		Design	Chd	Appd	Ref drawing	Vx proj	
		10/28	Single girder crane KBK 1102 lbs x 15'-7"				
		Date					
		Dept	-				M-film
Twin copy			Crane Source system: 1,100 lb freestanding steel workstation, 16 ft requested saddle				Issue

This document is the absolute property of Industrial Material Handling LLC. This document must not be copied without the written permission of Industrial Material Handling LLC or it's parent company DEMAG. The contents thereof must not be disclosed to a third party nor be used for any unauthorized purpose. Contravention will be prosecuted.


This document is the absolute property of Industrial Material Handling LLC. This document must not be copied without the written permission of Industrial Material Handling LLC or its parent company DEMAG. The contents thereof must not be disclosed to a third party nor be used for any unauthorized purpose. Contravention will be prosecuted.

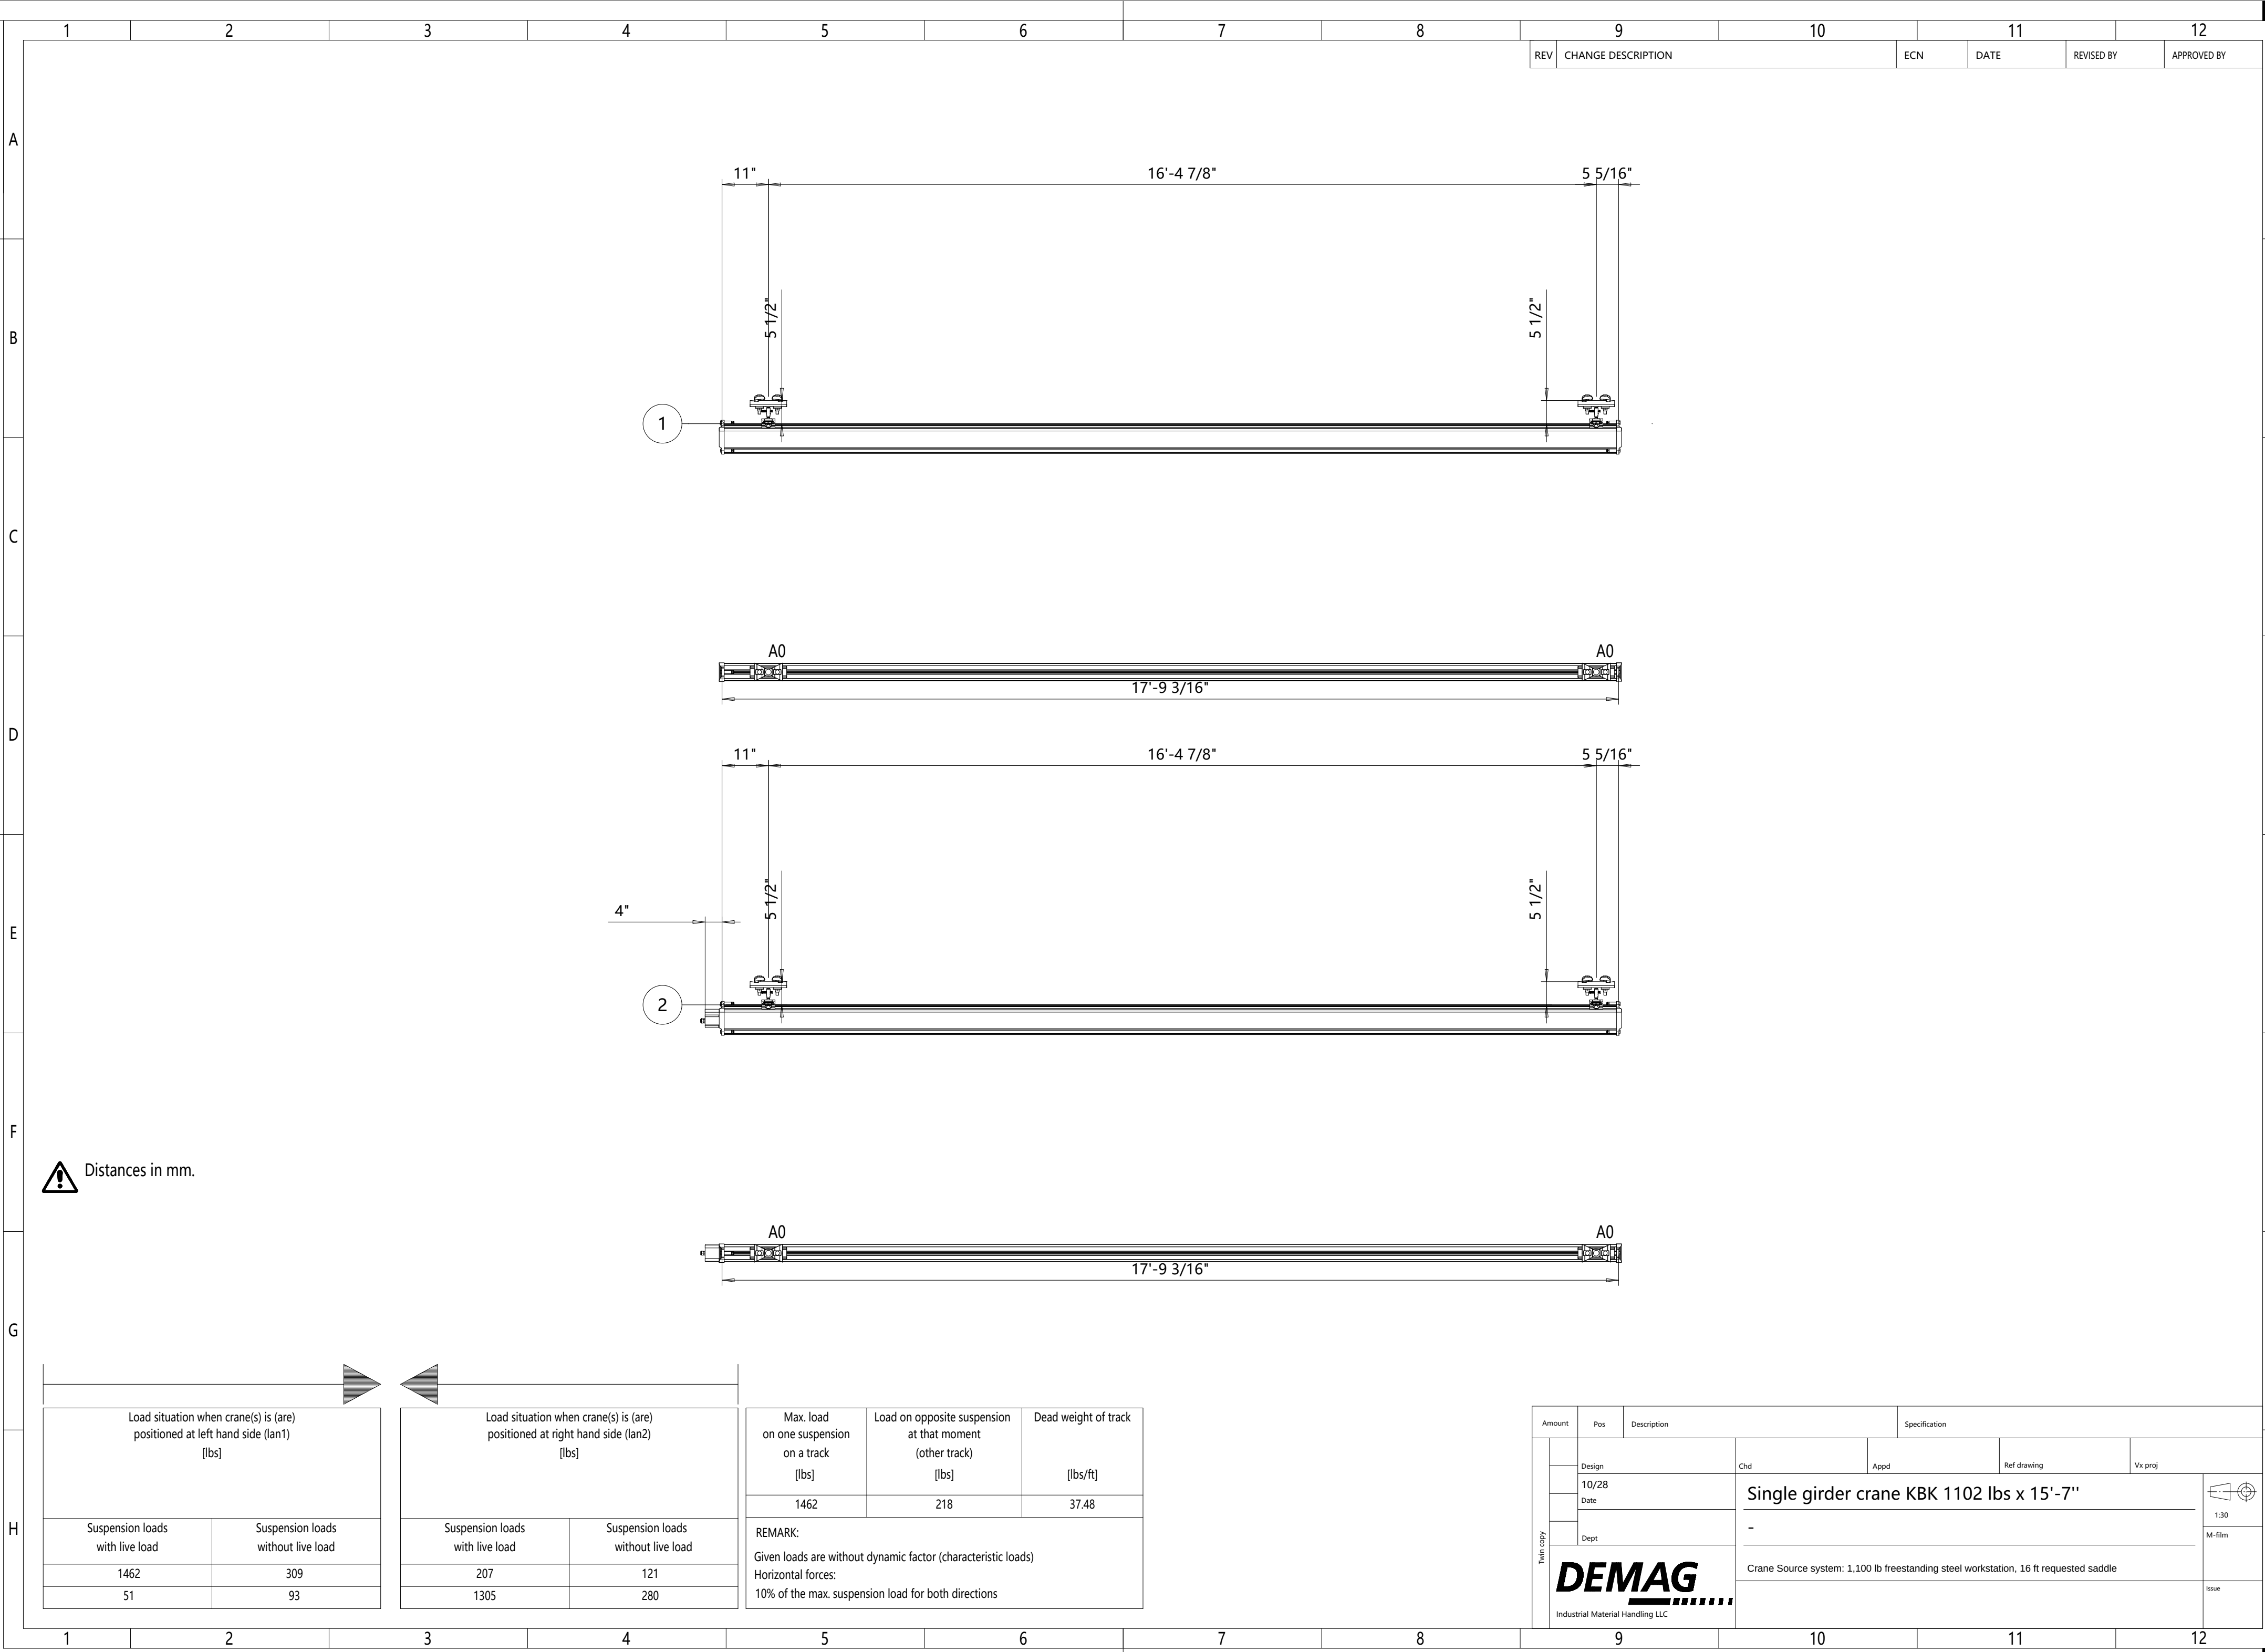

This document is the absolute property of Industrial Material Handling LLC. This document must not be copied without the written permission of Industrial Material Handling LLC or its parent company DEMAG. The contents thereof must not be disclosed to a third party nor be used for any unauthorized purpose. Contravention will be prosecuted.

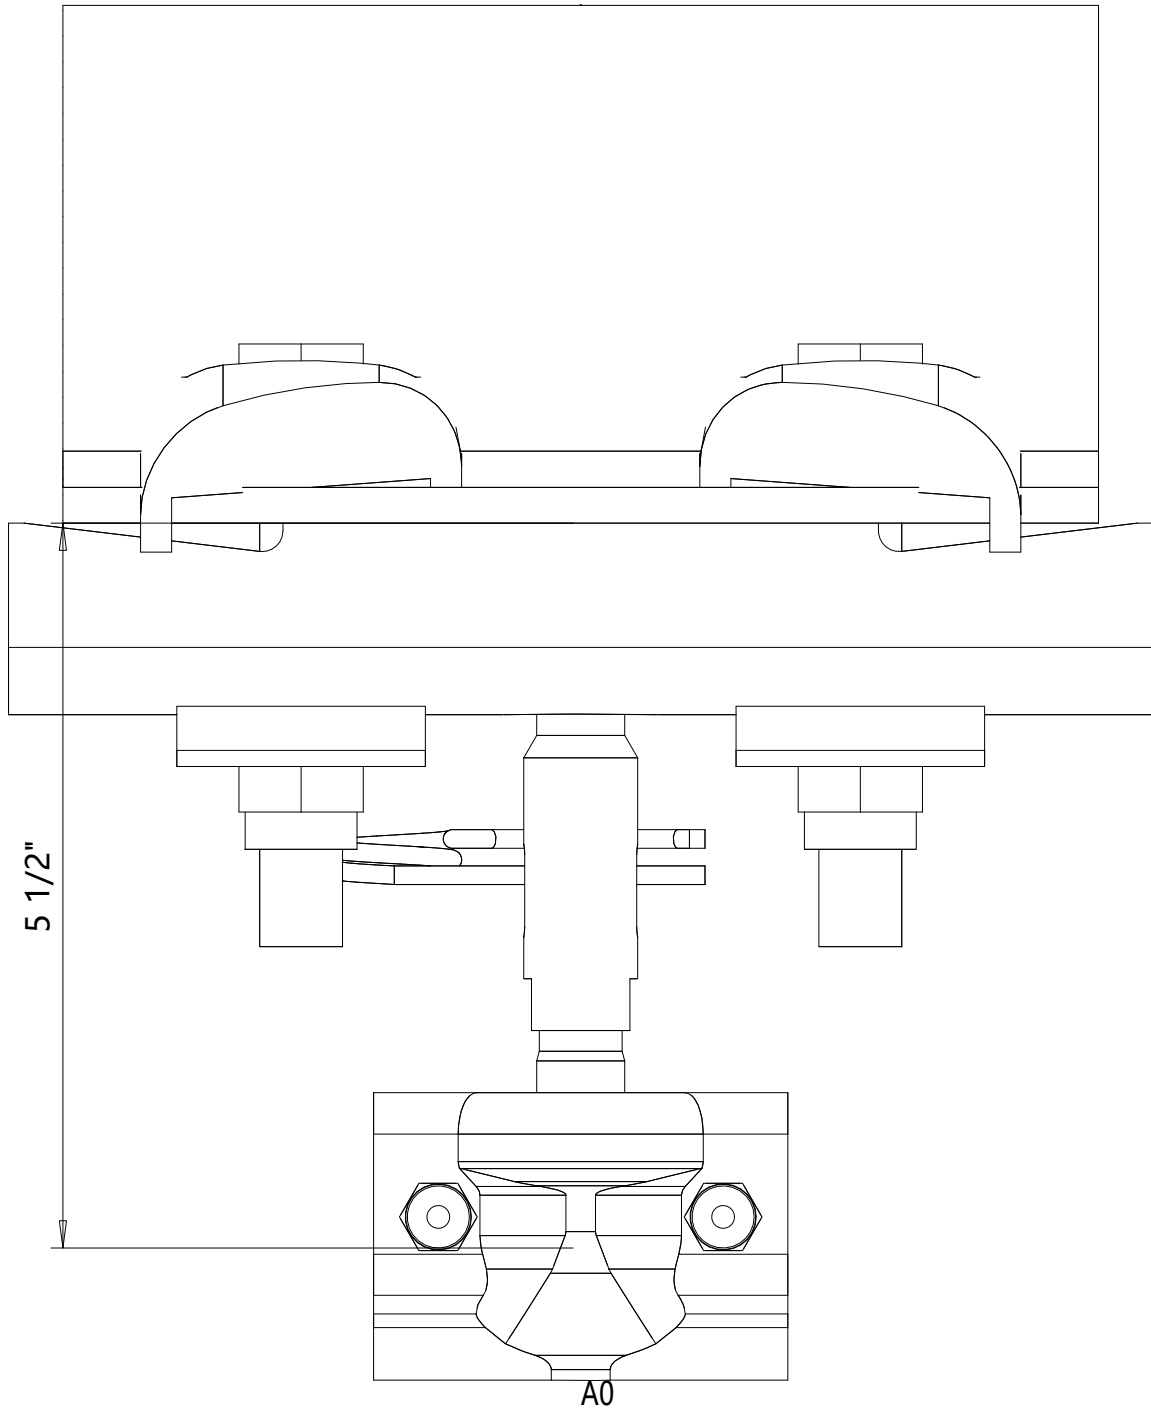


A0
Upper susp. bracket A suits for
FLANGE WIDTHS 2 13/16" - 5 1/2"

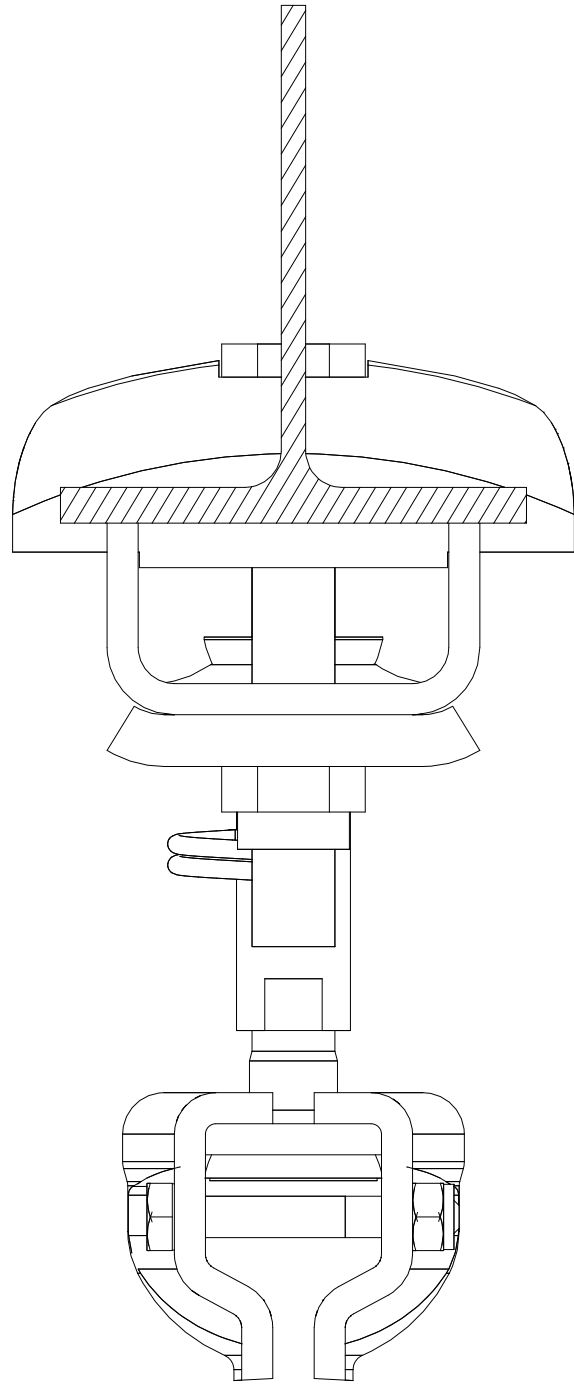

Amount		Pos	Description		Specification		
Twin copy			Design	Chd	Appd	Ref drawing	Vx proj
			10/28	Single girder crane KBK 1102 lbs x 15'-7"			
			Date				
			Dept	-			
				Crane Source system: 1,100 lb freestanding steel workstation, 16 ft requested saddle			
			DEMAG Industrial Material Handling LLC				Issue

This document is the absolute property of Industrial Material Handling LLC. This document must not be copied without the written permission of Industrial Material Handling LLC or its parent company DEMAG. The contents thereof must not be disclosed to a third party nor be used for any unauthorized purpose. Contravention will be prosecuted.

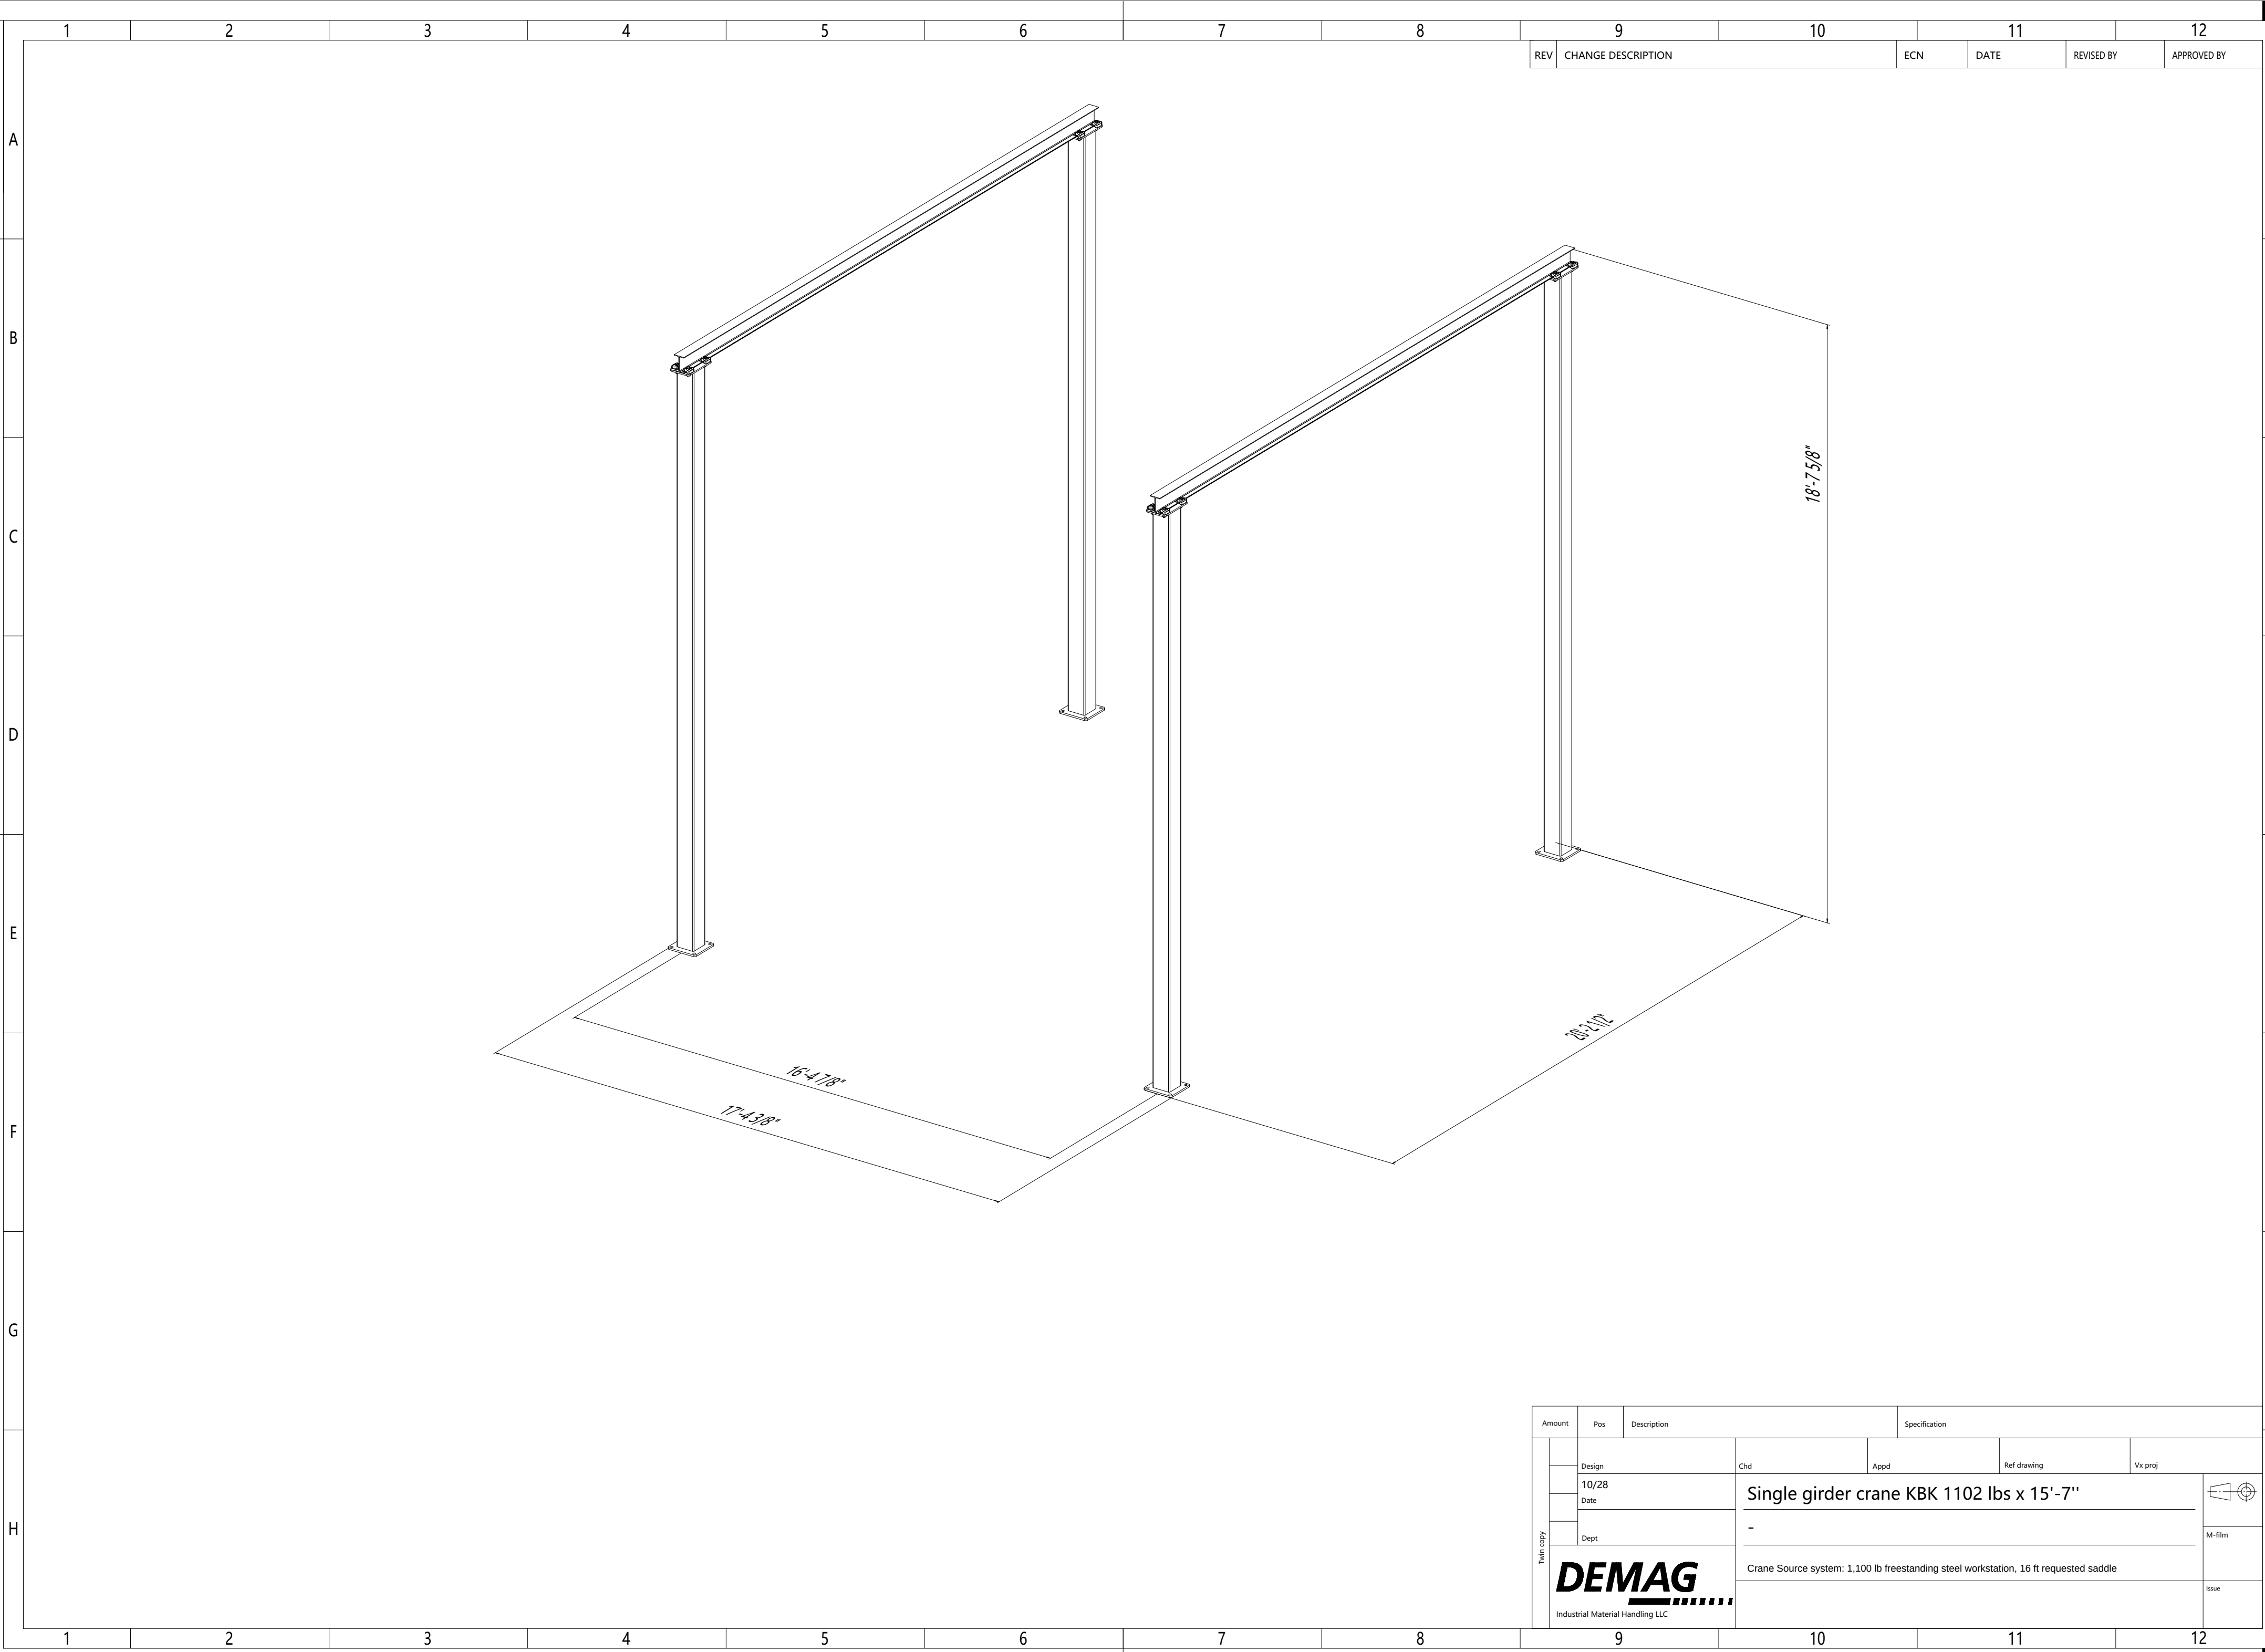

Amount		Pos	Description		Specification		
Twin copy		Design	Chd	Appd	Ref drawing	Vx proj	
		10/28	Single girder crane KBK 1102 lbs x 15'-7"				
		Date					
		Dept	-				M-film
	 Industrial Material Handling LLC						Crane Source system: 1,100 lb freestanding steel workstation, 16 ft requested saddle